




- 4 different analog input functions in one device
- RS-232, RS-485, USB or CANopen communication
- 2 relay outputs (optional 4), adjustable in different functions
- High sampling rate: 3.5 kHz
- Converting analog signals (4–20mA, 0–20mA, 0–10V, potentiometric, ratiometric) to CANopen signals, and CANopen signals to analog.
- Reversible analog output (10–0V, 20–0mA)
- Fast and multi-parameter configuration via USB
- Compact design
- Easy and user friendly interface
- Tare function
- Menu hiding or password protection

## Connection

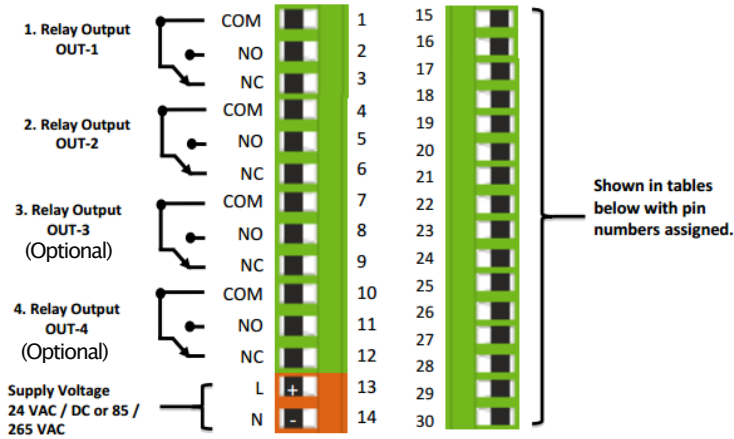

Digital Comn.	28	29	30
RS485	A	B	GND
RS232	Rx	Tx	GNDD
USB HID	USB CONNECTOR		
USB VIRTUAL	USB CONNECTOR		
CANopen	CAN HIGH	CAN LOW	GND

## Technical Properties

Display	1st Line(LED Bar): digit height:5mm 2nd Line: 7-segmentLED, digit height:14mm
Supply Voltage	24 V <sub>AC/DC</sub> 50/60 Hz 85–265 V <sub>AC</sub> 50/60 Hz
Power usage	9 VA / 2,7Watt Maksimum
Sensor Supply Voltage	Pot: 5 V <sub>DC</sub> 3,33 mV/V: 10 V <sub>DC</sub> 0–10V: 24 V <sub>DC</sub> 4–20mA: 24 V <sub>DC</sub> CANopen: 24 V <sub>DC</sub>
Max Sensor Supply Current	100 mA
Refresh Rate	3.5 kHz
Resolution	16 bit
Analogue Inputs	Potentiometer, 0.5–4.5V, 0–5V, 0–10V, 4–20mA, 0–20mA, 3,33 mV/V, 2mV/V, 2,5mV/V Ratiometric
Relay Outputs	2 pcs 250 V <sub>AC</sub> 3A (Resistive Load) Relay (optional 4 pcs)
Serial Communication (Optional)	RS-232, RS-485, USB, CANopen
Analogue Outputs (Optional)	0–10V, 0–5V, 0.5–4.5 V, 4–20mA, 0–20mA
Electrical Connection	2,5 mm <sup>2</sup> Universal Terminal
Weight	220 gr
Operating Temperature	0 ile 50 °C
Protection Class	IP60 Front Panel, IP20 Back Panel

ANALOG OUTPUTS	20	21	22	23	24*	25*	26*	27*
4–20mA Output	Signal Output	GND	X	X	Signal Output	GND	Signal Output	GND
0–10V Output								
0–5V Output								
0.5–4.5 V Output								
Tare Input	X	X	Tare	GND	X	X	X	X

Physical Interface	Protocol
RS-232, RS-485, VCP	ASCII, ModBus_RTU, ModBus_ASCII
USB	HID DEVICE
CAN	CANopen