

High Temperature Pressure Transmitter with Cooling Fins

SKL

Main features

- Measuring ranges 0...1 bar to 0...2000 bar
- All standard signals for industry, hydraulics and pneumatics
- Media temperature range -40°C to 180°C
- Ambient temperature range -40°C to 105°C
- Shock and vibration-resistant $> 1000\text{ g}$ shock, $> 20\text{ g}$ vibration
- No internal transmitting media (fully welded, "dry" measuring cell)
- Degree of protection from IP65 (special version up to IP69K)
- Compact and robust stainless steel design
- Precision class 0.5 %

Applications

- General industrial applications
- Automotive engineering
- Hydraulics
- Pneumatics
- Plant engineering and automation

Description

The SKL with cooling fins has been designed for applications with higher temperature requirements. Thanks to its stainless steel diaphragm and semiconductor thin-film technology, this pressure transmitter has excellent properties.

The stainless steel diaphragm is fully vacuum-tight, extremely burst-resistant and applicable with all standard media in automotive engineering, hydraulics, pneumatics, etc., as long as they are compatible with stainless steel. Its robust design guarantees high reliability also in rugged conditions. Its modular design offers a variety of signal, thread and connecting options.


The SKL series is suited for application in environments exposed to high thermal load.



Specification


PRESSURE RANGE								
Measuring range*	p [bar]	1,0	1,6	2,0	2,5	4,0	6,0	10,0
Overload pressure	p [bar]	6	6	6	6	10	20	20
Burst pressure	p [bar]	9	9	9	9	15	30	30
Measuring range*	p [bar]	16	20	25	40	60	100	160
Overload pressure	p [bar]	40	40	100	100	200	200	400
Burst pressure	p [bar]	60	60	150	150	300	300	600
Measuring range*	p [bar]	200	250	400	600	1000	1600	2000
Overload pressure	p [bar]	400	750	750	840	1200	2400	2400
Burst pressure	p [bar]	600	1000	1000	1050	1500	3000	3000
ELECTRICAL PARAMETER								
	signal				U _s [V _{DC}]	R _i [kΩ]	RA [Ω]	
Output signal * and maximum acceptable burden R _A	R _A in Ohm	4...20 mA (2-wire, 3-wire)			9...32		acc. to R _A = < (U _s - 10V) / 0,02 A	
		0...10 V _{DC} (3-wire)			12...32	> 5,0		
		1...5 V _{DC}			8...32	> 1,0		
		0,5...4,5 V _{DC} ratiometric			5 ± 10%	> 4,7		
Response time * (10-90%)	t [ms]	< 1						
Withstand voltage	U [V _{DC}]	350	option 710					
ACCURACY								
Accuracy @RT	% of the range	≤ 0,50**						
	BFSL	≤ 0,125						
Non-linearity	% of the range	≤ 0,15						
Repeatability	% of the range	≤ 0,10 ** incl. nonlinearity, hysteresis, repeatability, zero-offset- and final-offset						
Stability/year	% of the range	≤ 0,10 (acc. to IEC 61298-2)						
ACCEPTABLE TEMPERATURE RANGES								
Measuring medium, always	T [°C]	-40...160						
Measuring medium, up to 15 min		-40...180						
Ambience	T [°C]	-40...105						
Storage	T [°C]	-40...105						
Compensated range*	T [°C]	-20...85						
Temperature coefficient within the compensated range								
Mean TC offset	% of the range	≤ 0,15 / 10K						
Mean TC range	% of the range	≤ 0,15 / 10K						
Total error	% of the range	-40°C	2,00%					
	% of the range	105°C	2,00%					
MECHANICAL PARAMETER								
Parts in contact with the measuring medium*		stainless steel						
Housing*		stainless steel						
Shock resistance	g	1000	acc. to IEC 68-2-32					
Vibration resistance	g	20	acc. to IEC 68-2-6 and IEC 68-2-36					
Mass	m [g]	~ 250	(depending on design)					
CE - conformity		EC Directive 89/336/EWG						
IP system of protection		The IP system of protection as specified in the data sheets generally applies, with their mating plug connected. Relative pressure transmitters usually require a ventilated mating plug and/or cable to allow for pressure compensation. From a pressure range of 60bar, a ventilated mating plug and/or cable is not necessarily required.						
* others upon request								

Configuration -example-

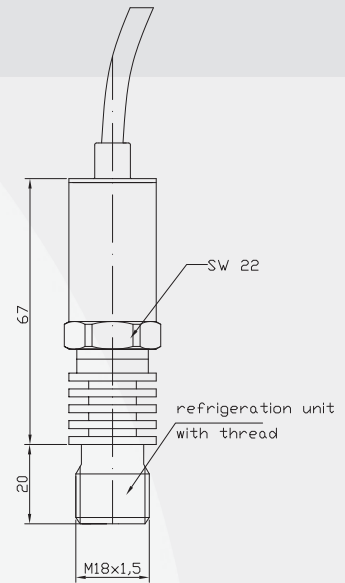


Connectors*


MVS/A
DIN EN 175301-803

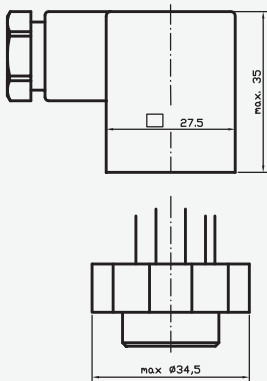


MVS/C
DIN EN 175301-803



male socket
M12x1 (S 763)




Cable output
steel




Pressure Connections*


G 1/4 A; DIN 3852; Form E




G 1/4 B




G 1/2 B



1/4 NPT



M18x1,5





* Custom-made adjustments acc. to pressure connections and connecting options are possible.

SKL



High Temperature Pressure Transmitter with Cooling Fins

Electrical Connections* (left: 2-wire, right: 3-wire)



MVS/A
DIN EN
175301-803





male
socket
M12x1
(S 763)



MVS/C
DIN EN
175301-803



cable
output



Legend

= power supply
 = consumer

(1) = red
 (2) = black
 (3) = white

* Custom-made adjustments acc. to pressure connections and connecting options are possible.

Product line

DS4	Electronic Pressure Switch	SMC	Pressure Transmitter with CANopen Interface
DPSX9I	Intrinsically Safe Electronic Pressure Switch for Current	SME	Pressure Transmitter in Miniature Design
DPSX9U	Intrinsically Safe Electronic Pressure Switch for Voltage	SMF	Pressure Transmitter with Flush Diaphragm
PS1	Level Sensor	SMH	High Pressure Transmitter
PSX2	Intrinsically Safe Level Sensor	SML	Pressure Transmitter for Industrial Application
SHP	High Precision Pressure Transmitter	SMO	Pressure Transmitter in Mobile Hydraulics
SIS	Low Pressure Transmitter in Short and Compact Design	SMS	OEM Pressure Transmitter for Hydraulics and Pneumatics
SIL	Low Pressure Transmitter for Industrial Application	SMX	Intrinsically Safe Pressure Transmitter for Industrial Application
SKE	High Temperature Pressure Transmitter with Detached Electronics	TPS	Multi-Function Transmitter for Pressure and Temperature
SKL	High Temperature Pressure Transmitter with Cooling Fins		



MEGATRON, s.r.o.

Mrštíkova 16 • 100 00 Praha 10
Tel.: 274 780 972 • Fax: 274 780 975

E-mail: info@megatron.cz
www.megatron.cz

Series	Output Signal	Pressure Range	Unit	Pressure Type	Process Connection	HEX	Electr. Connection	Extras																																																																																																																																																																			
SKL	20.1	0100000	PSI	(sr)	U98M	22	KS2	-																																																																																																																																																																			
<table border="1"> <tr><td>4 ... 20 mA / 2 wires</td><td>10.0</td></tr> <tr><td>0 ... 20 mA / 3 wires</td><td>10.1</td></tr> <tr><td>4 ... 20 mA / 3 wires</td><td>10.2</td></tr> <tr><td>0 ... 10 V</td><td>20.0</td></tr> <tr><td>1 ... 5 V</td><td>20.1</td></tr> <tr><td>0 ... 6 V</td><td>20.20</td></tr> <tr><td>0 ... 5 V</td><td>20.4</td></tr> <tr><td>0,5 ... 4,5 V ratiom.</td><td>37.0</td></tr> <tr><td>0,5 ... 4,5 V not rat.</td><td>40.0</td></tr> <tr><td>others</td><td>AAA</td></tr> </table>		4 ... 20 mA / 2 wires	10.0	0 ... 20 mA / 3 wires	10.1	4 ... 20 mA / 3 wires	10.2	0 ... 10 V	20.0	1 ... 5 V	20.1	0 ... 6 V	20.20	0 ... 5 V	20.4	0,5 ... 4,5 V ratiom.	37.0	0,5 ... 4,5 V not rat.	40.0	others	AAA	<table border="1"> <tr><td>bar</td><td>BAR</td></tr> <tr><td>kPa</td><td>KPA</td></tr> <tr><td>MPa</td><td>MPA</td></tr> <tr><td>PSI</td><td>PSI</td></tr> <tr><td>kg/cm2</td><td>KGC</td></tr> <tr><td>m WC</td><td>MWS</td></tr> <tr><td>in WC</td><td>IWS</td></tr> <tr><td>others</td><td>CCC</td></tr> </table>		bar	BAR	kPa	KPA	MPa	MPA	PSI	PSI	kg/cm2	KGC	m WC	MWS	in WC	IWS	others	CCC	<table border="1"> <tr><td>Relative Pressure</td><td>(g)</td></tr> <tr><td>Sealed Reference</td><td>(sr)</td></tr> </table>		Relative Pressure	(g)	Sealed Reference	(sr)	<table border="1"> <tr><td>MVC/A</td><td>MVA</td></tr> <tr><td>MVC/C</td><td>MVC</td></tr> <tr><td>Hirschmann Mini</td><td>HIM</td></tr> <tr><td>LEMO EWB 1S</td><td>LMS</td></tr> <tr><td>IS9 Industrial Socket</td><td>IS9</td></tr> <tr><td>Packard</td><td>PA1</td></tr> <tr><td>Male Socket M 5 / S707</td><td>M05</td></tr> <tr><td>Male Socket M12/ S763</td><td>M12</td></tr> <tr><td>Male Socket M16/ S723</td><td>M16</td></tr> <tr><td>Male Socket M18/ S714</td><td>M18</td></tr> <tr><td>Junior Timer</td><td>JTI</td></tr> <tr><td>Bajonet DIN 72585</td><td>BJD</td></tr> <tr><td>Bajonet VG 95234</td><td>BJV</td></tr> <tr><td>Super Seal</td><td>SUS</td></tr> <tr><td>Deutsch 3-poles</td><td>D03</td></tr> <tr><td>Deutsch 4-poles</td><td>D04</td></tr> <tr><td>QUICKON</td><td>QON</td></tr> <tr><td>Flying Leads 1,0*)</td><td>FL1</td></tr> <tr><td>Cable Gland Plastic 1,0 *</td><td>CP1</td></tr> <tr><td>Cable Steel 1,0 *)</td><td>KS1</td></tr> <tr><td>Cable Plastric 1,0 *)</td><td>KP1</td></tr> <tr><td>others</td><td>FFF</td></tr> </table> <p>*) e.g. with cable length 1.0 m</p>		MVC/A	MVA	MVC/C	MVC	Hirschmann Mini	HIM	LEMO EWB 1S	LMS	IS9 Industrial Socket	IS9	Packard	PA1	Male Socket M 5 / S707	M05	Male Socket M12/ S763	M12	Male Socket M16/ S723	M16	Male Socket M18/ S714	M18	Junior Timer	JTI	Bajonet DIN 72585	BJD	Bajonet VG 95234	BJV	Super Seal	SUS	Deutsch 3-poles	D03	Deutsch 4-poles	D04	QUICKON	QON	Flying Leads 1,0*)	FL1	Cable Gland Plastic 1,0 *	CP1	Cable Steel 1,0 *)	KS1	Cable Plastric 1,0 *)	KP1	others	FFF																																																																																
4 ... 20 mA / 2 wires	10.0																																																																																																																																																																										
0 ... 20 mA / 3 wires	10.1																																																																																																																																																																										
4 ... 20 mA / 3 wires	10.2																																																																																																																																																																										
0 ... 10 V	20.0																																																																																																																																																																										
1 ... 5 V	20.1																																																																																																																																																																										
0 ... 6 V	20.20																																																																																																																																																																										
0 ... 5 V	20.4																																																																																																																																																																										
0,5 ... 4,5 V ratiom.	37.0																																																																																																																																																																										
0,5 ... 4,5 V not rat.	40.0																																																																																																																																																																										
others	AAA																																																																																																																																																																										
bar	BAR																																																																																																																																																																										
kPa	KPA																																																																																																																																																																										
MPa	MPA																																																																																																																																																																										
PSI	PSI																																																																																																																																																																										
kg/cm2	KGC																																																																																																																																																																										
m WC	MWS																																																																																																																																																																										
in WC	IWS																																																																																																																																																																										
others	CCC																																																																																																																																																																										
Relative Pressure	(g)																																																																																																																																																																										
Sealed Reference	(sr)																																																																																																																																																																										
MVC/A	MVA																																																																																																																																																																										
MVC/C	MVC																																																																																																																																																																										
Hirschmann Mini	HIM																																																																																																																																																																										
LEMO EWB 1S	LMS																																																																																																																																																																										
IS9 Industrial Socket	IS9																																																																																																																																																																										
Packard	PA1																																																																																																																																																																										
Male Socket M 5 / S707	M05																																																																																																																																																																										
Male Socket M12/ S763	M12																																																																																																																																																																										
Male Socket M16/ S723	M16																																																																																																																																																																										
Male Socket M18/ S714	M18																																																																																																																																																																										
Junior Timer	JTI																																																																																																																																																																										
Bajonet DIN 72585	BJD																																																																																																																																																																										
Bajonet VG 95234	BJV																																																																																																																																																																										
Super Seal	SUS																																																																																																																																																																										
Deutsch 3-poles	D03																																																																																																																																																																										
Deutsch 4-poles	D04																																																																																																																																																																										
QUICKON	QON																																																																																																																																																																										
Flying Leads 1,0*)	FL1																																																																																																																																																																										
Cable Gland Plastic 1,0 *	CP1																																																																																																																																																																										
Cable Steel 1,0 *)	KS1																																																																																																																																																																										
Cable Plastric 1,0 *)	KP1																																																																																																																																																																										
others	FFF																																																																																																																																																																										
<table border="1"> <tr><td>-1 ... 0</td><td>9000100</td><td></td><td></td></tr> <tr><td>-1 ... +1</td><td>9000900</td><td></td><td></td></tr> <tr><td>0 ... 1,0</td><td>0000100</td><td>0 ... 10</td><td>0001000</td></tr> <tr><td>0 ... 1,6</td><td>0000160</td><td>0 ... 16</td><td>0001600</td></tr> <tr><td>0 ... 2,0</td><td>0000200</td><td>0 ... 20</td><td>0002000</td></tr> <tr><td>0 ... 2,5</td><td>0000250</td><td>0 ... 25</td><td>0002500</td></tr> <tr><td>0 ... 4</td><td>0000400</td><td>0 ... 40</td><td>0004000</td></tr> <tr><td></td><td></td><td>0 ... 100</td><td>0010000</td></tr> <tr><td></td><td></td><td>0 ... 160</td><td>0016000</td></tr> <tr><td></td><td></td><td>0 ... 200</td><td>0020000</td></tr> <tr><td></td><td></td><td>0 ... 250</td><td>0025000</td></tr> <tr><td></td><td></td><td>0 ... 400</td><td>0040000</td></tr> <tr><td></td><td></td><td>0 ... 600</td><td>0060000</td></tr> <tr><td></td><td></td><td>0 ... 1000</td><td>0100000</td></tr> <tr><td></td><td></td><td>0 ... 1600</td><td>0160000</td></tr> <tr><td></td><td></td><td>0 ... 2000</td><td>0200000</td></tr> <tr><td></td><td></td><td>others</td><td>BBB</td></tr> </table>		-1 ... 0	9000100			-1 ... +1	9000900			0 ... 1,0	0000100	0 ... 10	0001000	0 ... 1,6	0000160	0 ... 16	0001600	0 ... 2,0	0000200	0 ... 20	0002000	0 ... 2,5	0000250	0 ... 25	0002500	0 ... 4	0000400	0 ... 40	0004000			0 ... 100	0010000			0 ... 160	0016000			0 ... 200	0020000			0 ... 250	0025000			0 ... 400	0040000			0 ... 600	0060000			0 ... 1000	0100000			0 ... 1600	0160000			0 ... 2000	0200000			others	BBB	<table border="1"> <tr><td>G 1/8 A Shape A</td><td>G18A</td><td>22</td></tr> <tr><td>G 1/4 A Shape A</td><td>G14A</td><td>22</td></tr> <tr><td>G 1/4 A Shape E</td><td>G14E</td><td>22</td></tr> <tr><td>G 1/4 B (Manom.)</td><td>G14B</td><td>22</td></tr> <tr><td>G 1/2 B (Manom.)</td><td>G12B</td><td>27</td></tr> <tr><td>G 1/2 A Shape E</td><td>G12E</td><td>27</td></tr> <tr><td>1/8 NPT</td><td>18NP</td><td>22</td></tr> <tr><td>1/4 NPT</td><td>14NP</td><td>22</td></tr> <tr><td>7/16-20 UNF-2A</td><td>U72M</td><td>22</td></tr> <tr><td>7/16-20 UNF-2A/C</td><td>U72C</td><td>22</td></tr> <tr><td>7/16-20 UNF-2B</td><td>U72F</td><td>22</td></tr> <tr><td>3/8-24 UNF-2A</td><td>U38M</td><td>22</td></tr> <tr><td>3/8-24 UNF-2A/C</td><td>U38C</td><td>22</td></tr> <tr><td>1/2-20 UNF-2A</td><td>U12M</td><td>22</td></tr> <tr><td>M 8x1 male</td><td>M08M</td><td>22</td></tr> <tr><td>M 10x1 Shape A</td><td>M10A</td><td>22</td></tr> <tr><td>M 12x1 Shape E</td><td>M12E</td><td>22</td></tr> <tr><td>M 12x1 konical</td><td>M12C</td><td>22</td></tr> <tr><td>M 12x1,5 Ct-Ring</td><td>M12S</td><td>22</td></tr> <tr><td>M 14x1,5 Shape A</td><td>M14A</td><td>22</td></tr> <tr><td>M 14x1,5 Shape E</td><td>M14E</td><td>22</td></tr> <tr><td>M 14x1,5 ISO</td><td>M14O</td><td>22</td></tr> <tr><td>M 16x1,5 Shape A</td><td>M16A</td><td>22</td></tr> <tr><td>M 16x1,5 female</td><td>M16F</td><td>22</td></tr> <tr><td>M 18x1,5 male</td><td>M18M</td><td>22</td></tr> <tr><td>M 20x1,5 Manom.</td><td>M20B</td><td>22</td></tr> <tr><td>R 1/4 male</td><td>R14M</td><td>22</td></tr> <tr><td>others</td><td>DDDD</td><td>EE</td></tr> </table>		G 1/8 A Shape A	G18A	22	G 1/4 A Shape A	G14A	22	G 1/4 A Shape E	G14E	22	G 1/4 B (Manom.)	G14B	22	G 1/2 B (Manom.)	G12B	27	G 1/2 A Shape E	G12E	27	1/8 NPT	18NP	22	1/4 NPT	14NP	22	7/16-20 UNF-2A	U72M	22	7/16-20 UNF-2A/C	U72C	22	7/16-20 UNF-2B	U72F	22	3/8-24 UNF-2A	U38M	22	3/8-24 UNF-2A/C	U38C	22	1/2-20 UNF-2A	U12M	22	M 8x1 male	M08M	22	M 10x1 Shape A	M10A	22	M 12x1 Shape E	M12E	22	M 12x1 konical	M12C	22	M 12x1,5 Ct-Ring	M12S	22	M 14x1,5 Shape A	M14A	22	M 14x1,5 Shape E	M14E	22	M 14x1,5 ISO	M14O	22	M 16x1,5 Shape A	M16A	22	M 16x1,5 female	M16F	22	M 18x1,5 male	M18M	22	M 20x1,5 Manom.	M20B	22	R 1/4 male	R14M	22	others	DDDD	EE	<table border="1"> <tr><td>Restrictor 0.6 mm</td><td>R06</td></tr> <tr><td>Restrictors others</td><td>RXX</td></tr> <tr><td>Total Error other</td><td>FXX</td></tr> <tr><td>Cleand for Oxygen Use</td><td>O2C</td></tr> <tr><td>Metal Cone</td><td>SCO</td></tr> <tr><td>Schrader Opener 2,9</td><td>S29</td></tr> <tr><td>others (see below.)</td><td>GGG</td></tr> </table>		Restrictor 0.6 mm	R06	Restrictors others	RXX	Total Error other	FXX	Cleand for Oxygen Use	O2C	Metal Cone	SCO	Schrader Opener 2,9	S29	others (see below.)	GGG
-1 ... 0	9000100																																																																																																																																																																										
-1 ... +1	9000900																																																																																																																																																																										
0 ... 1,0	0000100	0 ... 10	0001000																																																																																																																																																																								
0 ... 1,6	0000160	0 ... 16	0001600																																																																																																																																																																								
0 ... 2,0	0000200	0 ... 20	0002000																																																																																																																																																																								
0 ... 2,5	0000250	0 ... 25	0002500																																																																																																																																																																								
0 ... 4	0000400	0 ... 40	0004000																																																																																																																																																																								
		0 ... 100	0010000																																																																																																																																																																								
		0 ... 160	0016000																																																																																																																																																																								
		0 ... 200	0020000																																																																																																																																																																								
		0 ... 250	0025000																																																																																																																																																																								
		0 ... 400	0040000																																																																																																																																																																								
		0 ... 600	0060000																																																																																																																																																																								
		0 ... 1000	0100000																																																																																																																																																																								
		0 ... 1600	0160000																																																																																																																																																																								
		0 ... 2000	0200000																																																																																																																																																																								
		others	BBB																																																																																																																																																																								
G 1/8 A Shape A	G18A	22																																																																																																																																																																									
G 1/4 A Shape A	G14A	22																																																																																																																																																																									
G 1/4 A Shape E	G14E	22																																																																																																																																																																									
G 1/4 B (Manom.)	G14B	22																																																																																																																																																																									
G 1/2 B (Manom.)	G12B	27																																																																																																																																																																									
G 1/2 A Shape E	G12E	27																																																																																																																																																																									
1/8 NPT	18NP	22																																																																																																																																																																									
1/4 NPT	14NP	22																																																																																																																																																																									
7/16-20 UNF-2A	U72M	22																																																																																																																																																																									
7/16-20 UNF-2A/C	U72C	22																																																																																																																																																																									
7/16-20 UNF-2B	U72F	22																																																																																																																																																																									
3/8-24 UNF-2A	U38M	22																																																																																																																																																																									
3/8-24 UNF-2A/C	U38C	22																																																																																																																																																																									
1/2-20 UNF-2A	U12M	22																																																																																																																																																																									
M 8x1 male	M08M	22																																																																																																																																																																									
M 10x1 Shape A	M10A	22																																																																																																																																																																									
M 12x1 Shape E	M12E	22																																																																																																																																																																									
M 12x1 konical	M12C	22																																																																																																																																																																									
M 12x1,5 Ct-Ring	M12S	22																																																																																																																																																																									
M 14x1,5 Shape A	M14A	22																																																																																																																																																																									
M 14x1,5 Shape E	M14E	22																																																																																																																																																																									
M 14x1,5 ISO	M14O	22																																																																																																																																																																									
M 16x1,5 Shape A	M16A	22																																																																																																																																																																									
M 16x1,5 female	M16F	22																																																																																																																																																																									
M 18x1,5 male	M18M	22																																																																																																																																																																									
M 20x1,5 Manom.	M20B	22																																																																																																																																																																									
R 1/4 male	R14M	22																																																																																																																																																																									
others	DDDD	EE																																																																																																																																																																									
Restrictor 0.6 mm	R06																																																																																																																																																																										
Restrictors others	RXX																																																																																																																																																																										
Total Error other	FXX																																																																																																																																																																										
Cleand for Oxygen Use	O2C																																																																																																																																																																										
Metal Cone	SCO																																																																																																																																																																										
Schrader Opener 2,9	S29																																																																																																																																																																										
others (see below.)	GGG																																																																																																																																																																										
Extras: (Please mention here all extras, like e.g. other pin connections etc - see also the corrsponding data sheet) AAA - BBB - etc.																																																																																																																																																																											