




- Measuring lengths up to 1000mm
- Twin bearing actuating rod
- Encoder signal output
- TTL or Push-Pull signal outputs
- Resolutions starting from 5µm
- IP65 protection class
- 3 m/s high operating speed
- Long service life

The LTS series magnetic linear encoder systems make measurement digitally by incremental encoder system pulse logic as contactless. The biggest advantage of these encoders are that they are easy to mount and are not affected by the deflections, as they are double-sided.

It has different resolutions from 5µm to 100µm. Measuring lengths between 50 mm and 1000mm are available. They are non-worn because they are non-contact, mechanically have infinite lifetimes. They are resistant to vibration and impacts. They are not affected by bad environmental conditions and electrical noise.

They are used in many sectors such as metal, marble, plastic, textile, saw, packaging.


Mechanical Dimensions

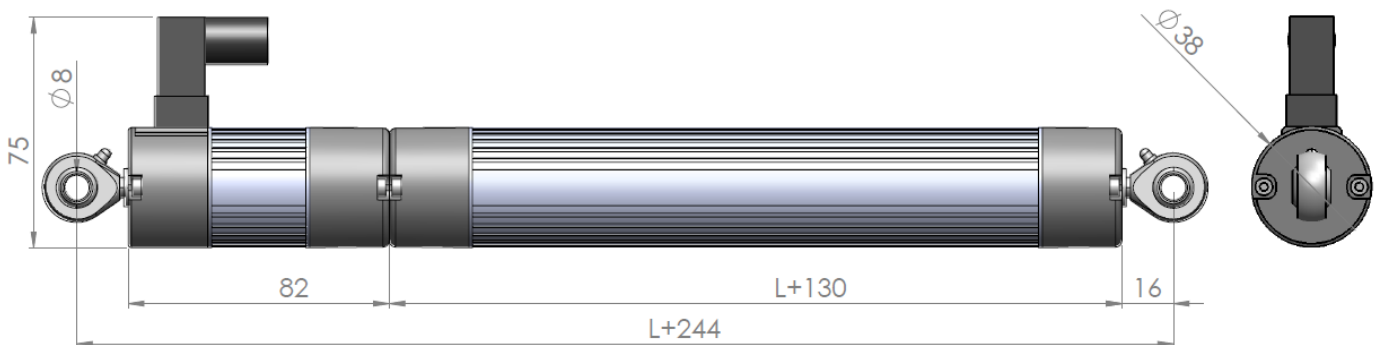

Technical Specifications

Measuring Distance	Between 50 mm and 1000 mm		
Resolution	5µm, 10µm, 20µm, 25µm, 62.5µm, 80µm and 100µm		
Output Signals	For model with DIN 43650-Cconnector: A, B For model with cable: A, B, Z or A, /A, B, /B, Z, /Z		
Electrical Interface		Supply	Output
	TTL	5VDC	5 VDC TTL RS422 Line Driver
	PP	10...30VDC	10...30VDC Push-Pull
	HTL	10...30VDC	5 VDC TTL RS422 Line Driver
	HPL	5...30VDC	5...30VDC Push-Pull
Operating temperature	-20°C and +85°C		
Electrical Connection	DIN 43650-Cconnector or cable		
Repeatability	±1Pulse		
Life	Mechanically infinite		
Housing Material	Anodized aluminum		

Electrical Connections



DIN 43650-C Connector	Signal
1	B
2	A
3	+Vcc
4	GND

Cable Color	Signal
YELLOW	A
WHITE	/B
RED	+Vcc
BLACK	0V
BLUE	/A
GREEN	B
GREY	/Z
PINK	Z
SHIELD	GROUND

Order Details

Model

LTS - XX - XXX - X - XXXX - XXX



Resolution

05: 05µm
 10: 10µm
 20: 20µm
 25: 25µm
 62,5: 62,5µm
 80: 80µm
 100: 100µm

Supply and Output Signal

TTL : 5VDC Supply Voltage,
 5 VDC TTL RS422 Line Driver Signal Output
 PP : 10...30VDC Supply Voltage,
 10...30VDC Push-Pull Signal Output
 HTL : 10...30VDC Supply Voltage,
 5 VDC TTL RS422 Line Driver Signal Output
 HPL : 5...30VDC Supply Voltage,
 5...30VDC Push-Pull Signal Output

Measuring Distance

50 : 50 mm
 1000 : 1000 mm

Signal Output

2 : A, B
 3 : A, B, Z
 6 : A, /A, B, /B, Z, /Z
 *On model with DIN 43650-C connector,
 only 2: A, B signal output is available

Electrical Connection

No code: DIN43650-Cconnector
 3M: 3 meters cable
 *Optionally different cable lengths