



- Rigid body system
- Better than $\pm 0.5\%$ accuracy
- 4–20mA, 0–10V or 3.33mV/V output options
- 0–35 to 0–2000bar / 0–500 to 0–30000psi
- Internal 80% shunt calibration
- Standard Inconel diaphragm
- Optional auto-zero function
- Applications with process temperature of up to 350°C
- Maximum Torque: 30Nm (22lbf ft)
- Optional safe relay function

MPTS series melt pressure sensors are used to measure the pressure and temperature of hot fluids in the plastics, rubber, food, etc. sectors. In this way, the quality of the production is higher and damage due to the high pressure is provided to the machine. They are ideal for the measurement of melt pressure in extrusion processes at temperatures of up to 350°C.

The MPTS series are low cost and high quality products. The MPTS makes mercury measurements in the series. In products in the health and food sector, oily measurements are made.

Designed to work directly with DCS and PLC thanks to analog output signals. EPA Series Digital Measuring and Control Devices are also available with the measured value being displayed.

TECHNICAL SPECIFICATIONS

Pressure Range	0~35 to 2000bar (0~500 to 0~30000psi)	Maximum Overload Pressure Rating	1.5 × FS(<1000bar) 1.2 × FS(>1000bar)
Accuracy	$\pm 0,5\%$ FS	Pressure Units	PSI, Bar, MPa or Kg/cm ²
Repeatability	$\pm 0,2\%$ FS	Internal Shunt Calibration	80%FSO \pm 1% FSO
Output Signal	4–20mA, 0–10V, 3.33mV/V	Measurement principle	4–arm bonded foil strain gage Wheatstone bridge
Supply Voltage	4–20mA and 0–10V output models: 24VDC (recommended), 9...36VDC 3.33mV/V output models: 10VDC (recommended), 6...12VDC	Temperature sensor	–
Max. diaphragm temp.	350°C	Electrical Connection	6PIN, 7PIN, 8PIN
Zero shift due to temperature change	0.15 MPa/100°C	Max Torque	30Nm
Process Connection	1/2–20UNF (45° conical seal) M14x1.5, M18x1.5, M22x1.5	Body	Titanium Nitride
		Diaphragm Material	Inconel

Safe relay function

An optional function available for excess pressure protection. The relay threshold is selected by customer at time of order.

Relay specifications :



- Rated current: 1A
- Rated voltage: 24vdc
- The relay contacts will open when the system is detected that the pressure exceeds the relay threshold

Auto-zero function



Sensors with an additional Auto-Zero function are extremely high level of user-friendliness. The zero variations can be eliminated either directly on the unit itself or remotely from control room by shorting two pins.

ELECTRICAL CONNECTIONS



Current Output (4-20mA, 2 wires)

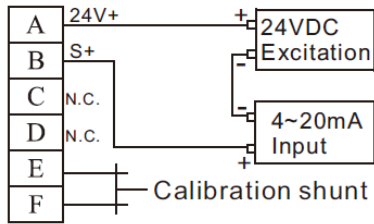



Voltage Output (0-10V)

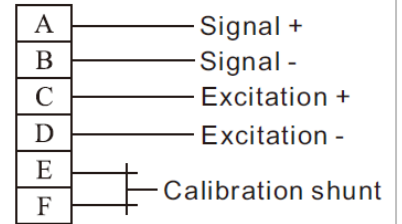



Auto-Zero (4-20mA, 2 wires)

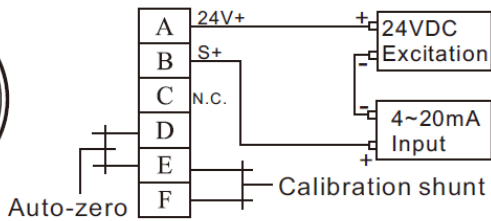


Auto-Zero (0-10V)

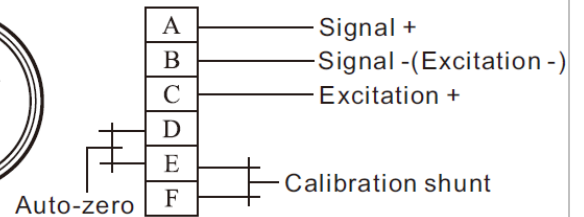

mV/V Output

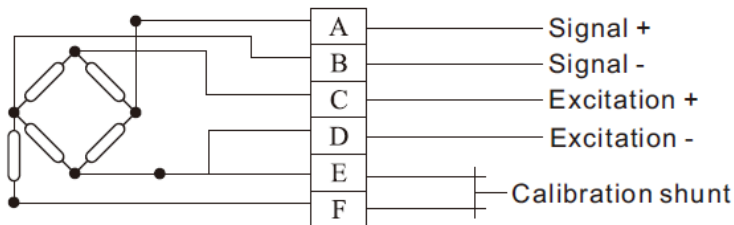

Safe Relay Switch (4-20mA, 0-10V)

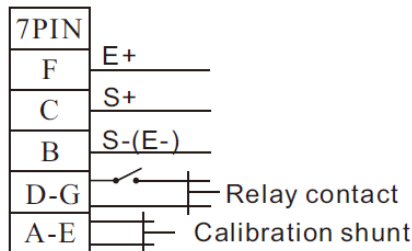

ACCESSORIES

Connectors

5PIN mating connector
6PIN mating connector
8PIN mating connector


Extension cables

5PIN/6PIN connector with 5m cable
5PIN/6PIN connector with 10m cable
5PIN/6PIN connector with 15m cable
5PIN/6PIN connector with 30m cable

Accessories

Mounting bracket
Drill kit (1/2"-20UNF,M18X1.5 etc)
Cleaning kit(1/2"-20UNF,M18X1.5 etc)
Thread adaptors

MECHANICAL DIMENSIONS

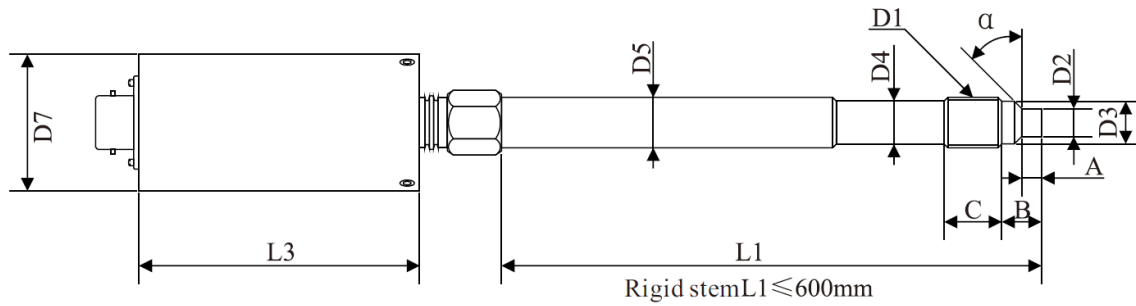

D1	M12X1.5	M14X1.5	1/2"-20	M18X1.5	M22X1.5	M28X1.5	G3/4"	PF3/8"	1½-16"	3.25"	3.5"	
D2	Ø7.8	Ø7.8	Ø7.8	Ø9.8	Ø9.8 Ø15.8	Ø17.8	Ø17.8	Ø9.8	Ø23.5	Ø23.5	Ø23.5	
D3	Ø10	Ø11.8	Ø10.5	Ø15.5	Ø19.5	Ø24	Ø24	Ø14	Ø33.5	Ø33	Ø33	
D4	Ø10	Ø12	Ø10.8	Ø16	Ø19.5	Ø25	Ø24	Ø14				
D5	Ø11.7	Ø13.8	Ø12.7	Ø17								
D6	Standard dimension Ø17; other dimensions can be customized											
D7	Standard dimension Ø38; other dimensions can be customized											
α	Standard angle 45°, other angle can be customized											
A	5.5	5.5	5.5	6	10	11	11	8	13	13.5	13.5	
B	11	12.5	12	14	16	17	17	12	21	51	61	
C	17	17	17	20	35	28	40	25	37	19	19	
L1	Standard dimension 150 mm, other dimensions can be customized											
L2	Standard dimension 470 mm, other dimensions can be customized											
L3	Standard dimension 78 mm, other dimensions can be customized											
Gasket	45° slopes				plain end face				flange installation			

WARNING (!) : For installation use a maximum tightening torque of 40 Nm.

ORDER CODE

Model	Pressure Range											Body Length (L1)		
	350Bar : 0...350Bar 500Bar : 0...500Bar 700Bar : 0...700Bar 1000Bar : 0...1000Bar 2000Bar : 0...2000Bar											150 : 150 mm		
MPTS	-	112C	-	350bar	-	1 / 2	-	150	-	V				
Body Model				Mechanical Connection				Output Signal						
112C: Rigid Body (TIN Coating)				1/2-20: ½"-20 UNF M14: M14 x 1,5				0-10V: 0-10VDC 4-20mA: 4-20mA 3.33mV/V: 3,33mV/V						